


CONTIGUOUS

4" Min. of Non-Expansive Granular Material Compacted to 95% of Modified Procter

NON-CONTIGUOUS

4" Min. of Non-Expansive Granular Material Compacted to 95% of Modified Procter

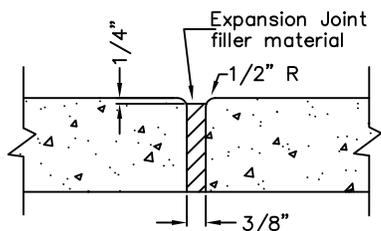

EXPANSION JOINT

NOTES:

1. - - - - - Expansion joints at curb returns, adjacent to structures and at 25' intervals.
2. ——— 3/4" grooves with 1/2" radius edges at 5' intervals.
3. Concrete shall be Portland Concrete Cement with a minimum 28 day compressive strength of 4000 PSI.

REVISION	APPROVED	DATE	CITY OF COEUR d'ALENE STANDARD DRAWING	APPROVED BY:
			<p><i>SIDEWALK JOINTS AND SECTIONS</i></p>	<p><i>[Signature]</i> 4/20/15 CITY ENGINEER, PE 7432 DATE:</p>
				DWG NO. C-5