



STANDARD CURB AND GUTTER SECTION

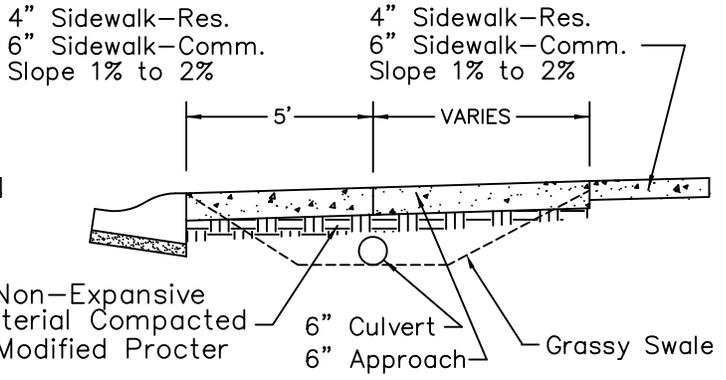

ROLLED CURB AND GUTTER SECTION

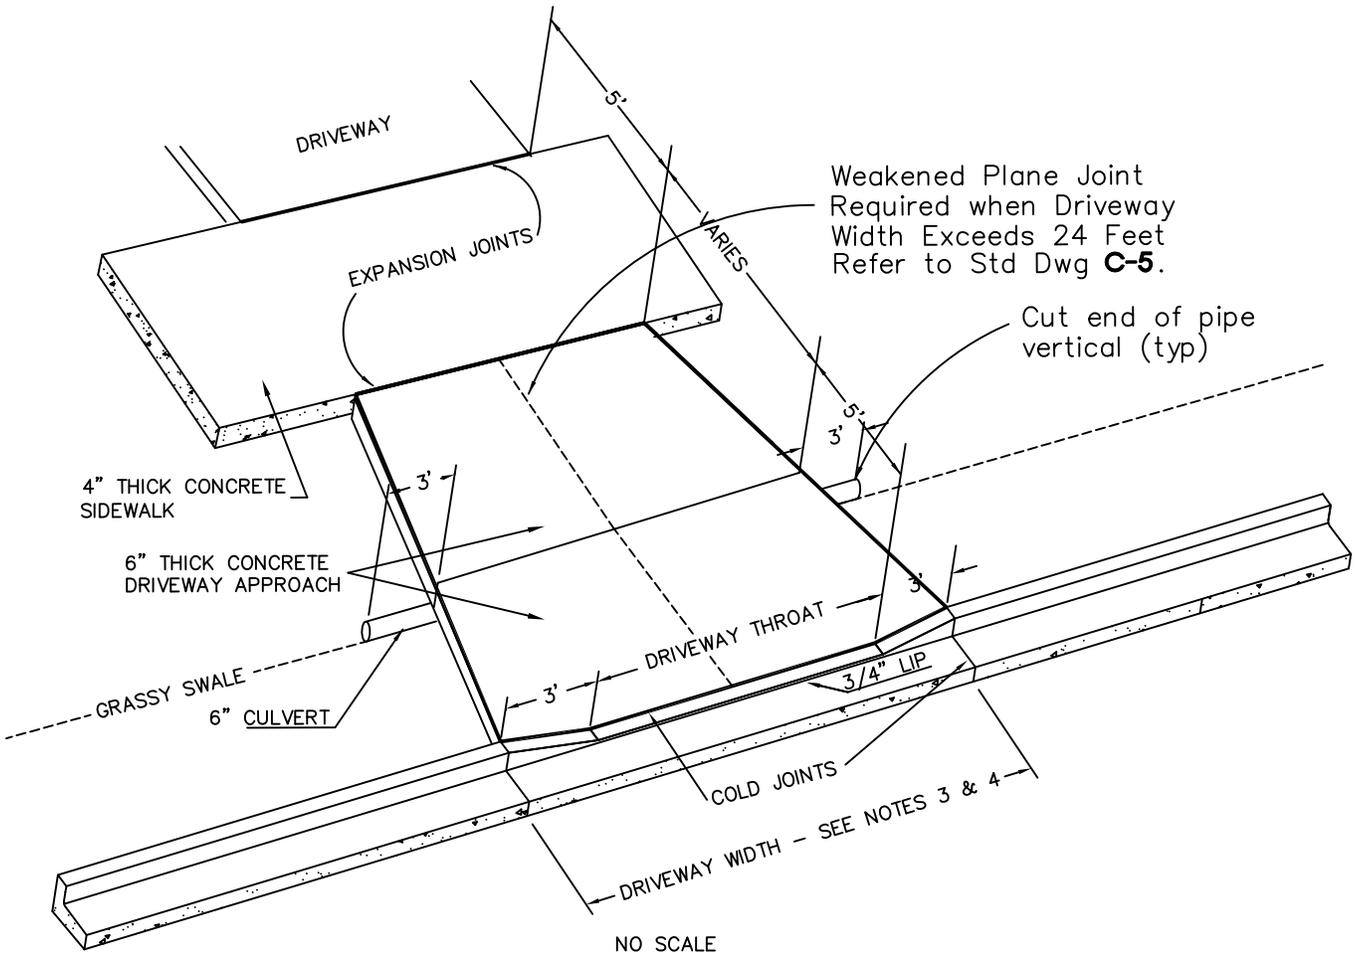

NOTES:

1. Concrete shall be a minimum 28 day compressive strength of 3000 PSI.
2. Culvert material shall be Schedule 40 or equal, smooth interior wall.
3. Residential approach width: 16' min - 36' max.
4. Commercial approach width: 18' min - 40' max.
5. See Standard Drawing **C-13** for driveway location.
6. See Standard Drawing **SD-7** for grassy swale detail.

REVISION	APPROVED	DATE
1. Added culvert		

CITY OF COEUR d'ALENE STANDARD DRAWING

**DRIVEWAY APPROACH
WITH CULVERT**

APPROVED BY:	
<i>Robert D. Miller</i>	4/20/15
CITY ENGINEER, PE 7432	DATE:
DWG NO.	C-9