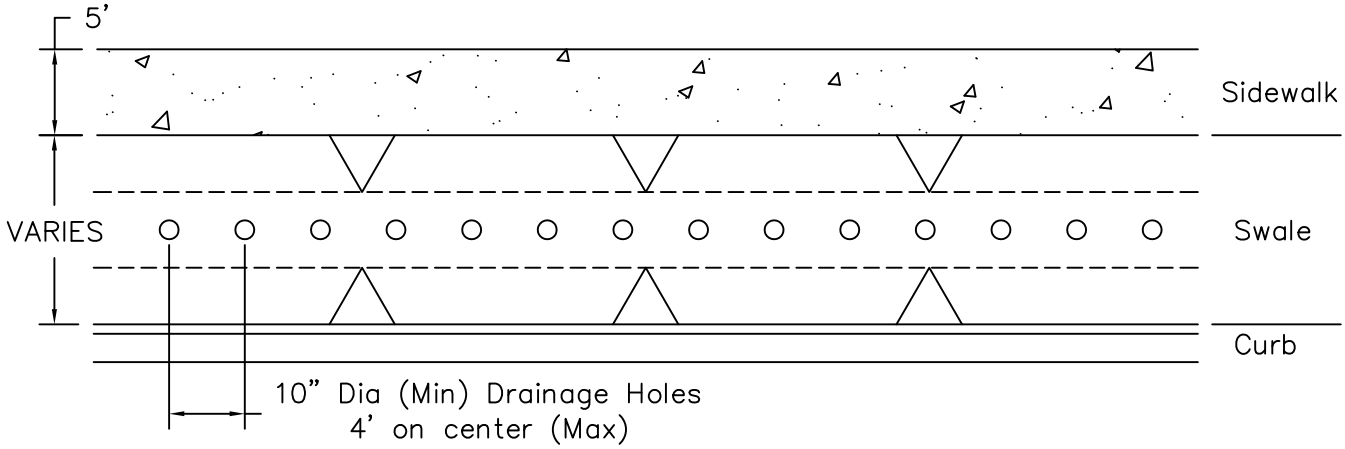

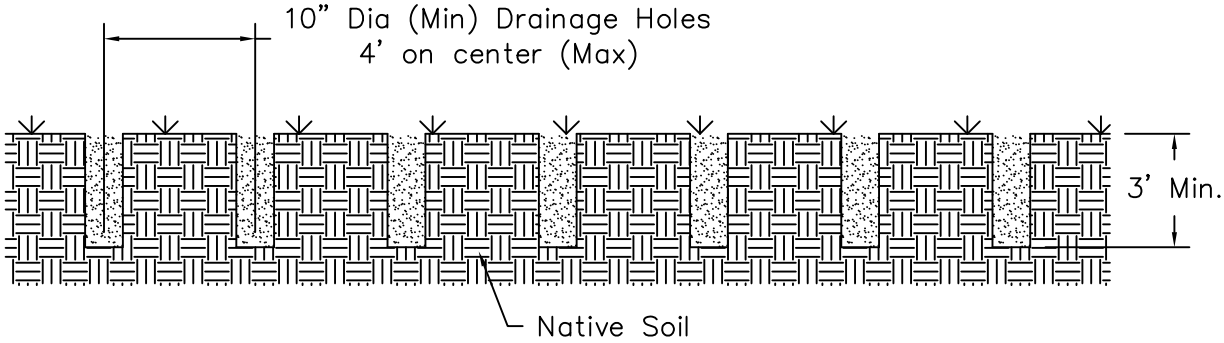

NOTES:

1. Excavate holes, remove soil, and backfill with clean gravel – max. 1/2" aggregate.

REVISION	APPROVED	DATE	CITY OF COEUR d'ALENE STANDARD DRAWING	APPROVED BY:
			SWALE REHABILITATION TYPE "A"	CITY ENGINEER, PE 7432 — DATE: 4/20/15
				DWG NO. SD–7A