
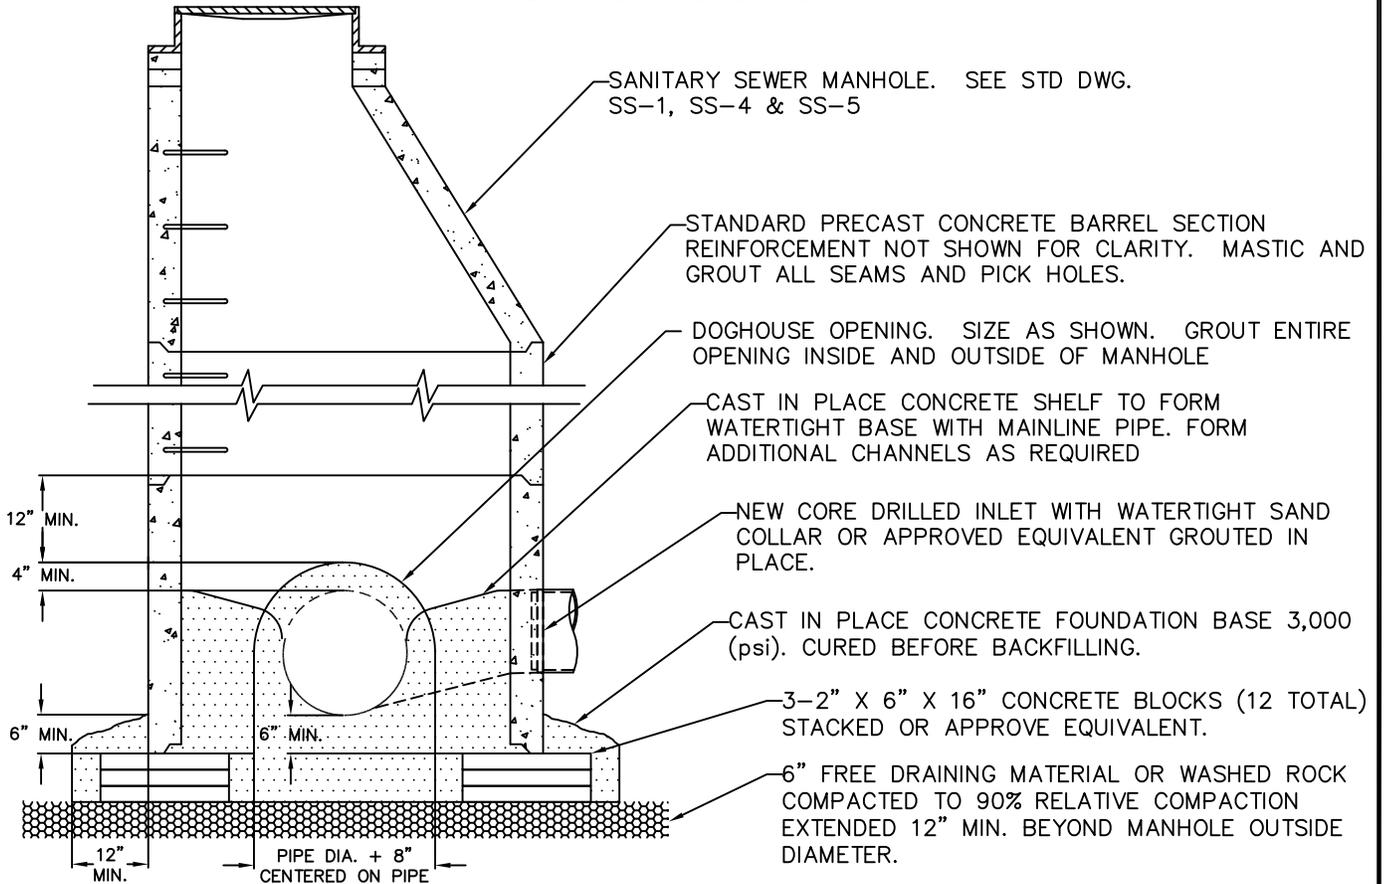


# NOTES THIS DETAIL:

1. DOGHOUSE MANHOLES ARE ONLY USED WHEN PLACING A NEW MANHOLE DIRECTLY OVER AN EXISTING ACTIVE SEWER MAINLINE PIPE AND MUST BE PRE-APPROVED BY THE CITY.
2. DOGHOUSE MANHOLE SHALL BE CENTERED OVER EXISTING MAINLINE PIPE AND MUST MAINTAIN A 24" MINIMUM SEPARATION FROM THE NEAREST PIPE JOINT OR FITTING.
3. PRIOR TO CUTTING AN ACCESS INTO THE EXISTING MAINLINE PIPE, A PASSING HYDROSTATIC WATER TEST MUST BE APPROVED BY THE CITY. HYDROSTATIC TEST SHALL CONFORM TO I.S.P.W.C. (LATEST REVISION).
4. CUT ACCESS INTO TOP OF EXISTING MAINLINE PIPE BOTH SIDES TO MATCH FLUSH WITH MANHOLE SHELF FINISH GRADE. REMOVE ALL SHARP OR IRREGULAR EDGES AND DISPOSE OF REMOVED SECTION OF PIPE.

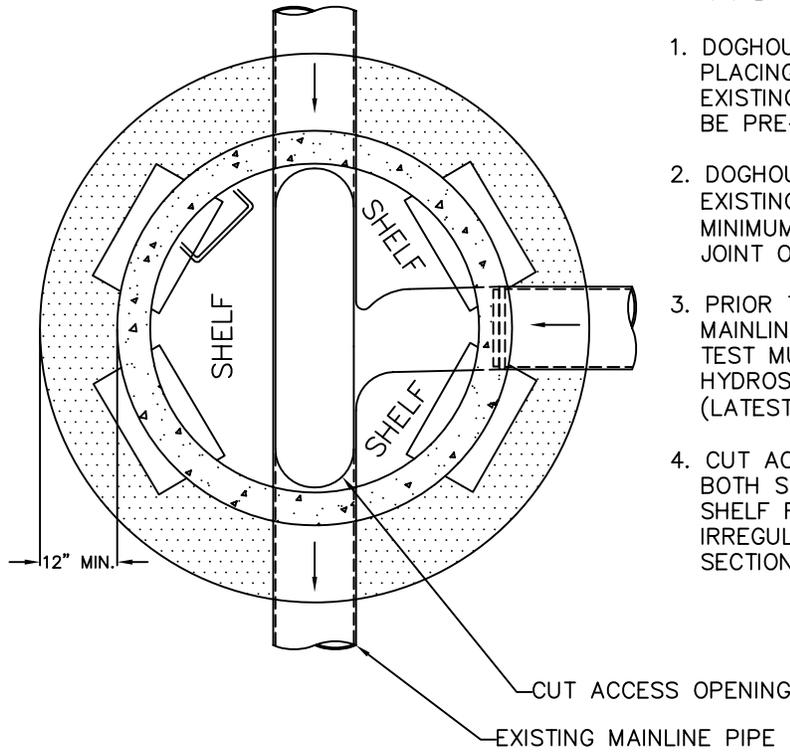

REVISION	APPROVED	DATE
		6/07/07
		3/31/15

CITY OF COEUR d'ALENE STANDARD DRAWING

## DOGHOUSE MANHOLE

APPROVED BY:

*Robert D. Baker* 4/20/15  
 CITY ENGINEER, PE 7432 DATE:

DWG NO. SS-3