


**PLAN**

**RADIUS APPROACH**

NOT TO SCALE

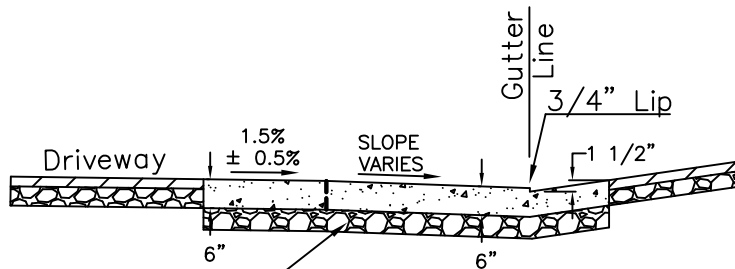

Minimum 4"  
Base Material compacted to  
95% of Modified Proctor

**RADIUS APPROACH**

NOT TO SCALE

**NOTES:**

1. Truncated domes shall be installed on high volume approaches.
2. Radius shall be a 10 feet minimum, 20 feet maximum.
3. Concrete shall have a 28 day compressive strength of 4000 PSI.
4. A weakened plane joint shall be installed in the center of the approach if the approach width exceeds 24 feet.



CITY OF COEUR D'ALENE STANDARD DRAWING

APPROVED BY:

**COMMERCIAL  
APPROACH**

*Chris Bosley*  
CITY ENGINEER, PE 10804

4/4/25  
DATE:

DWG NO.

C-11